


iS330 Kit

240 Volt motor, Suitable for gates up to 6 metres and 600Kg


SWING GATE OPENERS




-) Easy to setup using, Eclipse® Operating System (EOS)
-) Powerful hydraulic motors
-) Die-cast Aluminium motor cover for great durability
-) Mechanical stopper built in the motor for added protection.
-) Anti-crash adjustment
-) Waterproof cover design
-) Anti-wind adjustment
-) Soft start and soft stop
-) Easy installation



Die-cast aluminum cover. Maximum protection against environment



Manual release in case of power shut down.



Strong and reliable. Easy installation




**HYDRAULIC POWER
FOR GATES WITH UP TO
6 METRE LEAF**

TECHNICAL DATA

Power supply	240 Volts AC
Motor voltage	240 Volts AC
Max gate weight	600kg
Max gate length	6 metres
Max pressure	50bar
Opening cycle	34sec
Closing cycle	40sec
Compression	795Kg
Traction	638Kg
Operating temperature	-20°C~50°C

Typical installation

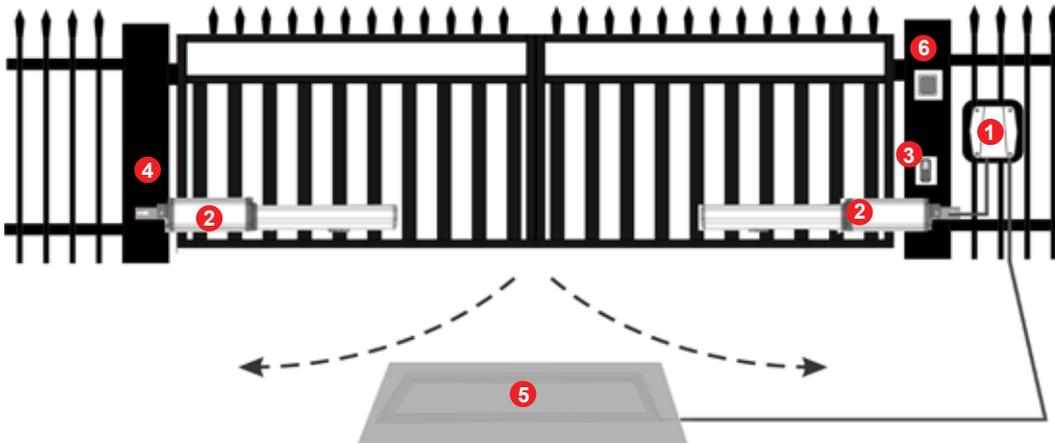

- | | |
|---|----------------------------|
| 1 | Intelligent control box |
| 2 | iS330 motor |
| 3 | PE1500 photo electric beam |
| 4 | Reflector for PE1500 |
| 5 | Vehicle detector |
| 6 | Wireless Keypad |

Kit contents



Intelligent control box with Eclipse operating system



iS330 dual swing hydraulic motors




3 x Keyring remotes with frequency hopping



Long range reflector type photo electric beam

Dimensions

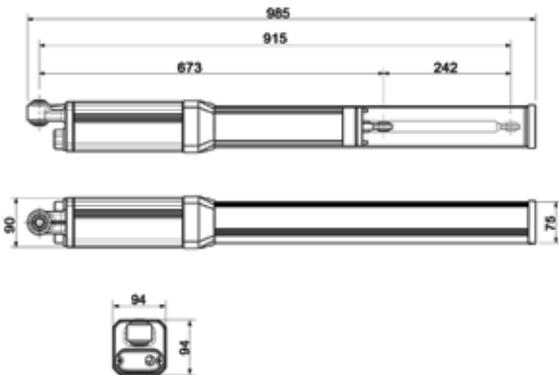

Ordering Code

PART NUMBERS	DESCRIPTION
iS330D	Dual swing motor kit
iS330	Single swing motor kit

Optional Accessories



PentaCODE® Keypad

Wireless keypad compatible with Pentacode receivers



GSM Gate Opener

Open your gate with your mobile phone for free!



Locking Actuator

-) 12 Volts DC
-) 50mm Stroke
-) 20mm Stainless Steel Pin



Pre-formed Loops

Pre-formed vehicle detector in-ground loops



Vehicle Detector

-) 12, 24 or 240 Volts
-) 1 or 2 loops
-) Medium or high sensitivity



Flashing Lights

-) 12 or 24 Volts DC
-) Red, Blue & Amber
-) 90 Flashes \ min